


STARBORN® CAP-TOR® xd

Color Matched Screws for Composite and PVC Decking

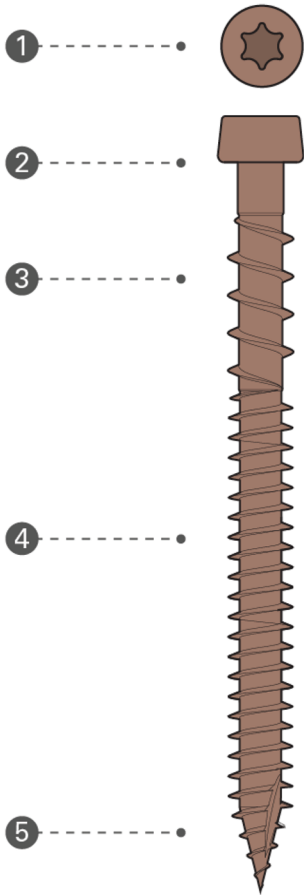

CAP-TOR xd COLOR		DECKING BRAND COLOR		
		AZEK	DECKORATORS	TIMBERTECH
	#31 TAN-GRAY	WEATHERED TEAK	COSTA	
	#34 BROWN	ENGLISH WALNUT MAHOGANY	BOULDER MESA	BROWN OAK DARK ROAST DARK TEAK
	#37 GRAY	CASTLE GATE COASTLINE	GLACIER SALTWATER	ASHWOOD DRIFTWOOD MARITIME GRAY SEA SALT GRAY SILVER MAPLE STONE ASH
	#43 ASHWOOD			WHITEWASH CEDAR BOARDWALK
	#53 DARK GRAY		DUSK RIDGELINE SIERRA	
	#54 WARM GRAY	SLATE GRAY TIMBER GRAY	TUNDRA	RECLAIMED CHESTNUT WEATHERED OAK
	#55 DARK SLATE		SLATE	
	#62 SAHARA	TOASTED WHEAT		NATURAL WHITE OAK
	#63 BUCKSKIN			ANTIQUE LEATHER TIGERWOOD COCONUT HUSK
	#64 SAND	BROWNSTONE FRENCH WHITE OAK	CLIFFSIDE	
	#65 ROSY BROWN		SANDBAR	PECAN
	#71 CHOCOLATE	AMERICAN WALNUT DARK HICKORY KONA	KYAYA PATHWAY	DARK COCOA ESPRESSO
	#73 JAVA			DARK OAK MOCHA RUSTIC ELM
	#81 CEDAR		SEDONA	

1. Star Drive Favored by professionals; extra deep recess reduces cam-out.		1. Star Drive Favorecido por los profesionales; El rebaje extra profundo reduce la salida de la leva.
2. Undercut Head Cleanly penetrates the hard outer layer of capstock decking.		2. Undercut Head Penetra limpiamente la capa exterior dura de la plataforma de capstock.
3. Reverse Thread Prevents mushrooming and other surface defects.		3. Reverse Thread Previene la formación de hongos y otros defectos superficiales.
4. Tri-Lobe Shank and Acute Thread Angle For increased driving power and cleaner penetration through harder decking materials.		4. Tri-Lobe Shank and Acute Thread Angle Para una mayor potencia de conducción y una penetración más limpia a través de materiales de cubierta más duros.
5. Type 17 Auger Tip For faster, easier entry; helps prevent splitting.		5. Type 17 Auger Tip Para una entrada más rápida y fácil; ayuda a prevenir la división.
Depth Setter Compatible Collated available		Compatible con medidor de profundidad Compaginado disponible

Installation	Instalación
Install flush with decking surface. Do not overdrive.	Instale al ras con la superficie de la terraza. No conduzca en exceso.
Install two screws per joist.	Instale dos tornillos por viga.
Predrilling is recommended when fastening within 1" from the end of a deck board.	Se recomienda perforar previamente cuando se fija dentro de 1" desde el extremo de una tabla de plataforma.
Recommended: For a clean and professional finish use the SMART-BIT® Depth Setter Tool in combination with screws.	Recomendado: Para un acabado limpio y profesional, use la herramienta de ajuste de profundidad SMART-BIT® en combinación con tornillos